



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint®_rate2006 = 212

Cisco UCS C24 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECint_rate_base2006 = 204

CPU2006 license: 9019


Test date: May-2013

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

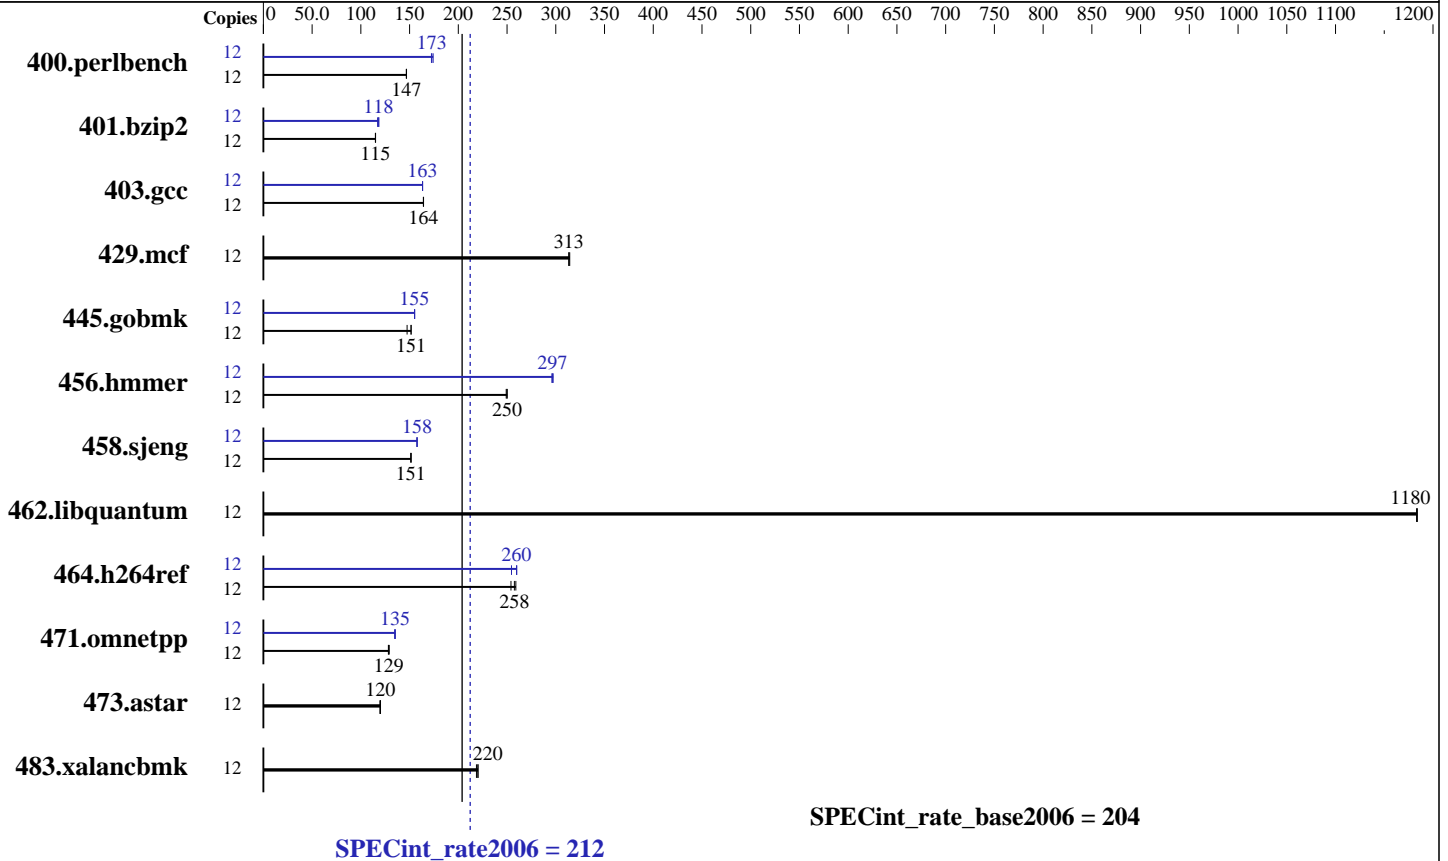

Hardware

CPU Name: Intel Xeon E5-2430
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 X 300GB SAS, 15K RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 212

Cisco UCS C24 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECint_rate_base2006 = 204

CPU2006 license: 9019

Test date: May-2013

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	798	147	<u>799</u>	<u>147</u>	799	147	12	<u>678</u>	<u>173</u>	680	172	673	174
401.bzip2	12	1008	115	1006	115	<u>1007</u>	<u>115</u>	12	<u>979</u>	<u>118</u>	988	117	978	118
403.gcc	12	<u>588</u>	<u>164</u>	589	164	588	164	12	591	163	<u>591</u>	<u>163</u>	592	163
429.mcf	12	<u>349</u>	<u>313</u>	349	313	348	314	12	<u>349</u>	<u>313</u>	349	313	348	314
445.gobmk	12	<u>831</u>	<u>151</u>	830	152	854	147	12	<u>811</u>	<u>155</u>	811	155	812	155
456.hammer	12	<u>448</u>	<u>250</u>	448	250	449	249	12	377	297	378	296	<u>378</u>	<u>297</u>
458.sjeng	12	959	151	<u>959</u>	<u>151</u>	959	151	12	920	158	922	158	<u>921</u>	<u>158</u>
462.libquantum	12	<u>210</u>	<u>1180</u>	210	1180	210	1180	12	<u>210</u>	<u>1180</u>	210	1180	210	1180
464.h264ref	12	<u>1031</u>	<u>258</u>	1045	254	1025	259	12	1043	255	<u>1022</u>	<u>260</u>	1022	260
471.omnetpp	12	581	129	585	128	<u>583</u>	<u>129</u>	12	554	135	<u>555</u>	<u>135</u>	557	135
473.astar	12	<u>702</u>	<u>120</u>	705	120	701	120	12	<u>702</u>	<u>120</u>	705	120	701	120
483.xalancbmk	12	379	219	<u>376</u>	<u>220</u>	376	220	12	379	219	<u>376</u>	<u>220</u>	376	220

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Power Technology set to Custom
Processor Power State C6 set to Disabled
Processor Power State C1 Enhanced set to Disabled
Energy Performance Set to Performance
DRAM Clock Throttling Set to Performance

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Fri May 17 04:20:22 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2430 0 @ 2.20GHz
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 212

Cisco UCS C24 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECint_rate_base2006 = 204

CPU2006 license: 9019

Test date: May-2013

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Platform Notes (Continued)

```

1 "physical id"s (chips)
12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:      49402388 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 16 21:27

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      134G  13G  116G  10% /

Additional information from dmidecode:
Memory:
  6x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 212

Cisco UCS C24 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECint_rate_base2006 = 204

CPU2006 license: 9019

Test date: May-2013

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 212

Cisco UCS C24 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECint_rate_base2006 = 204

CPU2006 license: 9019

Test date: May-2013

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 212

Cisco UCS C24 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECint_rate_base2006 = 204

CPU2006 license: 9019

Test date: May-2013

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:31:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 June 2013.