



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECint®\_rate2006 = 172

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint\_rate\_base2006 = 163

CPU2006 license: 13


Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

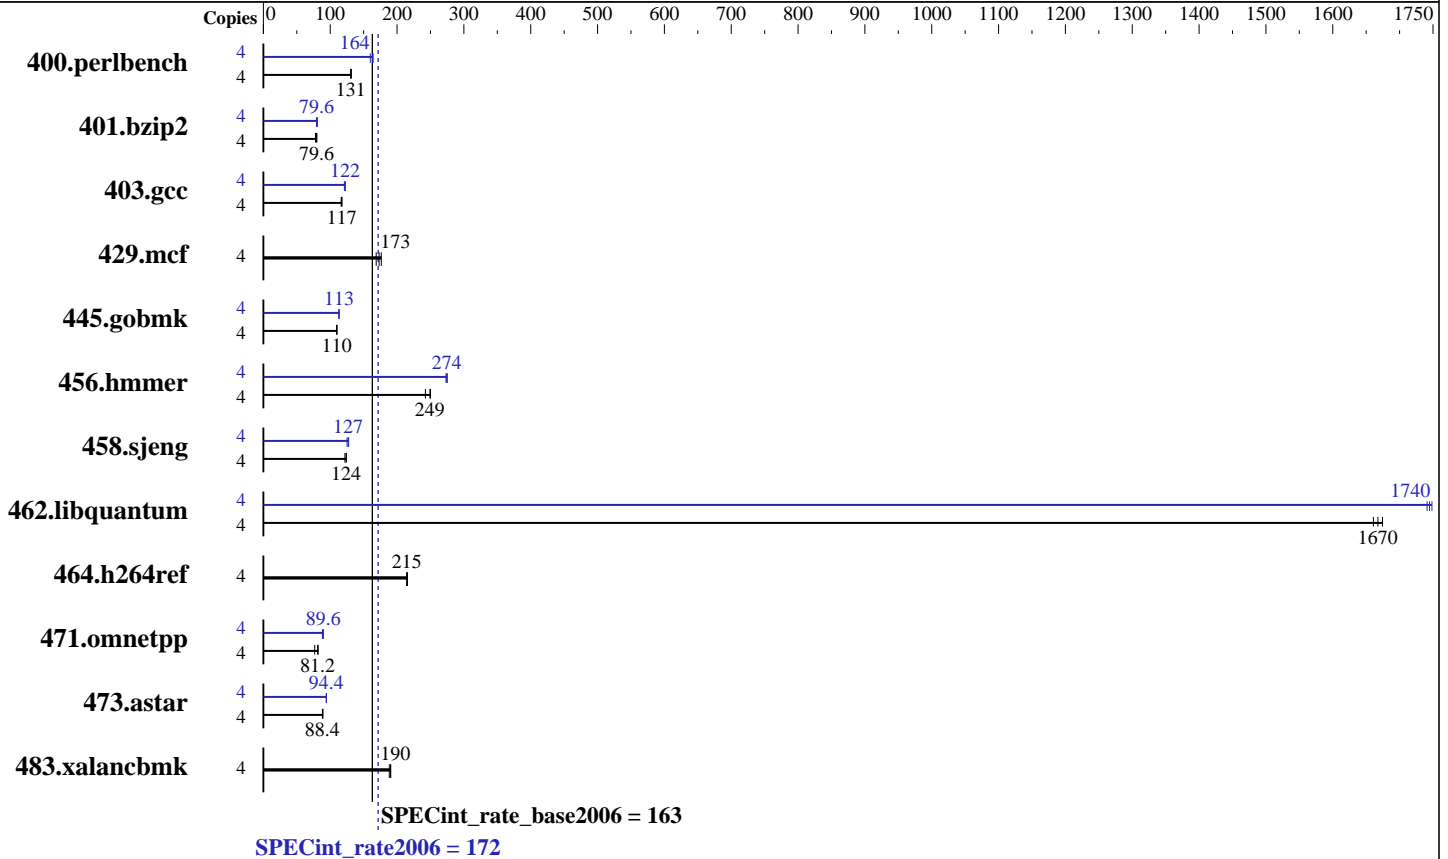

### Hardware

CPU Name: Intel Core i5-4590  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)  
 Disk Subsystem: 1 TB SATA HDD, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Microsoft Windows 8.1 Pro  
 6.3.9600 N/A Build 9600  
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 172

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint\_rate\_base2006 = 163

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	297	132	<u>299</u>	<u>131</u>	299	131	4	244	160	<u>239</u>	<u>164</u>	239	164
401.bzip2	4	484	80.0	494	78.0	<u>485</u>	<u>79.6</u>	4	485	79.6	<u>484</u>	<u>79.6</u>	477	80.8
403.gcc	4	<u>274</u>	<u>117</u>	276	116	274	118	4	266	121	263	122	<u>263</u>	<u>122</u>
429.mcf	4	<u>211</u>	<u>173</u>	216	169	207	176	4	<u>211</u>	<u>173</u>	216	169	207	176
445.gobmk	4	<u>382</u>	<u>110</u>	381	110	383	110	4	<u>371</u>	<u>113</u>	370	113	371	113
456.hammer	4	149	250	154	242	<u>150</u>	<u>249</u>	4	<u>136</u>	<u>274</u>	136	275	137	273
458.sjeng	4	390	124	397	122	<u>390</u>	<u>124</u>	4	<u>382</u>	<u>127</u>	380	128	387	125
462.libquantum	4	49.5	1670	49.9	1660	<u>49.7</u>	<u>1670</u>	4	47.6	1740	<u>47.5</u>	<u>1740</u>	47.4	1750
464.h264ref	4	411	216	413	214	<u>412</u>	<u>215</u>	4	411	216	413	214	<u>412</u>	<u>215</u>
471.omnetpp	4	305	82.0	<u>308</u>	<u>81.2</u>	325	76.8	4	279	89.6	<u>279</u>	<u>89.6</u>	283	88.4
473.aster	4	<u>317</u>	<u>88.4</u>	315	89.2	317	88.4	4	<u>298</u>	<u>94.4</u>	299	94.0	297	94.4
483.xalancbmk	4	146	188	145	190	<u>145</u>	<u>190</u>	4	146	188	145	190	<u>145</u>	<u>190</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 32-bit binaries with the command:  
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

## Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on Clt10C37B4DEDF8 Sat Jun 28 01:59:41 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'  
OS Name : Microsoft Windows 8.1 Pro  
OS Version : 6.3.9600 N/A Build 9600  
System Manufacturer: ASUS  
System Model : All Series  
Processor(s) : 1 Processor(s) Installed.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 172

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint\_rate\_base2006 = 163

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Platform Notes (Continued)

[01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3301 Mhz  
BIOS Version : American Megatrends Inc. 2001, 6/13/2014  
Total Physical Memory: 8,006 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0  
L2CacheSize : 1024  
L3CacheSize : 6144  
MaxClockSpeed : 3301  
Name : Intel(R) Core(TM) i5-4590 CPU @ 3.30GHz  
NumberOfCores : 4  
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU  
+ 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DWIN32 -DSPEC\_CPU\_NO\_INTTYPES  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 172

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint\_rate\_base2006 = 163

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Base Optimization Flags (Continued)

C++ benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc10 -Qstd=c99

456.hmmr: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe  
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc10

473.astar: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
456.hmmr: -DSPEC\_CPU\_P64  
458.sjeng: -DSPEC\_CPU\_P64  
462.libquantum: -DSPEC\_CPU\_P64  
464.h264ref: -DWIN32 -DSPEC\_CPU\_NO\_INTTYPES  
473.astar: -DSPEC\_CPU\_P64  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 172

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint\_rate\_base2006 = 163

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Peak Optimization Flags (Continued)

400.perlbench: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F512000000

403.gcc: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

458.sjeng: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4  
/F512000000

462.libquantum: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlw32M.lib  
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000 shlw64M.lib  
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 172

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint\_rate\_base2006 = 163

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Peak Other Flags (Continued)

```
456.hmmr: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
          -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
          -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
          -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
458.sjeng: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
           -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
462.libquantum: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
                -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
                -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
                -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

C++ benchmarks:

```
473.astar: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
           -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Sep 9 10:50:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 August 2014.