



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®2006 = 57.7

Express5800/GT110g-S (Intel Xeon E3-1220 v3)

SPECint_base2006 = 55.6

CPU2006 license: 9006


Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

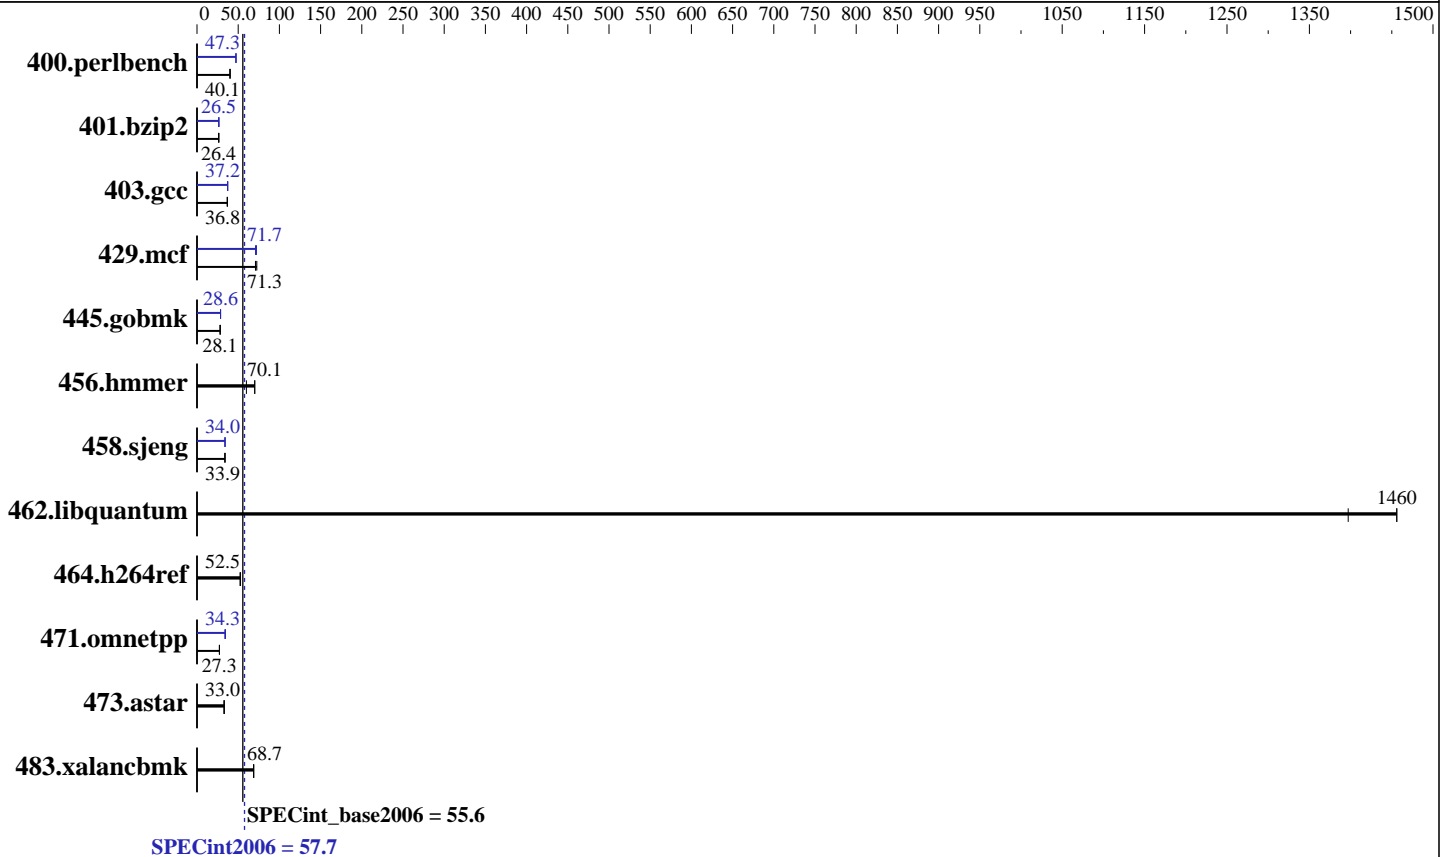

Hardware

CPU Name: Intel Xeon E3-1220 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Kernel 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = **57.7**

Express5800/GT110g-S (Intel Xeon E3-1220 v3)

SPECint_base2006 = **55.6**

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	244	40.0	243	40.1	243	40.2	207	47.3	207	47.3	206	47.3
401.bzip2	366	26.4	366	26.4	366	26.4	365	26.5	364	26.5	364	26.5
403.gcc	218	36.9	219	36.8	219	36.8	216	37.2	216	37.2	217	37.2
429.mcf	126	72.6	128	71.3	129	71.0	127	71.7	128	71.0	126	72.1
445.gobmk	372	28.2	373	28.1	373	28.1	367	28.6	367	28.6	367	28.6
456.hammer	133	70.1	156	60.0	133	70.1	133	70.1	156	60.0	133	70.1
458.sjeng	357	33.9	357	33.9	357	33.9	356	34.0	356	34.0	356	34.0
462.libquantum	14.2	1460	14.2	1460	14.8	1400	14.2	1460	14.2	1460	14.8	1400
464.h264ref	419	52.8	422	52.5	422	52.4	419	52.8	422	52.5	422	52.4
471.omnetpp	229	27.3	230	27.1	229	27.3	182	34.3	181	34.5	184	33.9
473.astar	213	33.0	214	32.9	213	33.0	213	33.0	214	32.9	213	33.0
483.xalancbmk	101	68.7	100	68.9	100	68.7	101	68.7	100	68.9	100	68.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "4"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 57.7

Express5800/GT110g-S (Intel Xeon E3-1220 v3)

SPECint_base2006 = 55.6

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
445.gobmk: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
471.omnetpp: icpc -m32
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 57.7

Express5800/GT110g-S (Intel Xeon E3-1220 v3)

SPECint_base2006 = 55.6

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 456.hmmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
 -opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias

456.hmmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-ra-region-strategy=block -ansi-alias
 -Wl,-z,muldefs -L/sh -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 57.7

Express5800/GT110g-S (Intel Xeon E3-1220 v3)

SPECint_base2006 = 55.6

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 26 18:09:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 August 2014.