



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 820 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)

SPECint®_rate2006 = 541

SPECint_rate_base2006 = 521

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2005

Hardware Availability: Oct-2013

Software Availability: Sep-2013

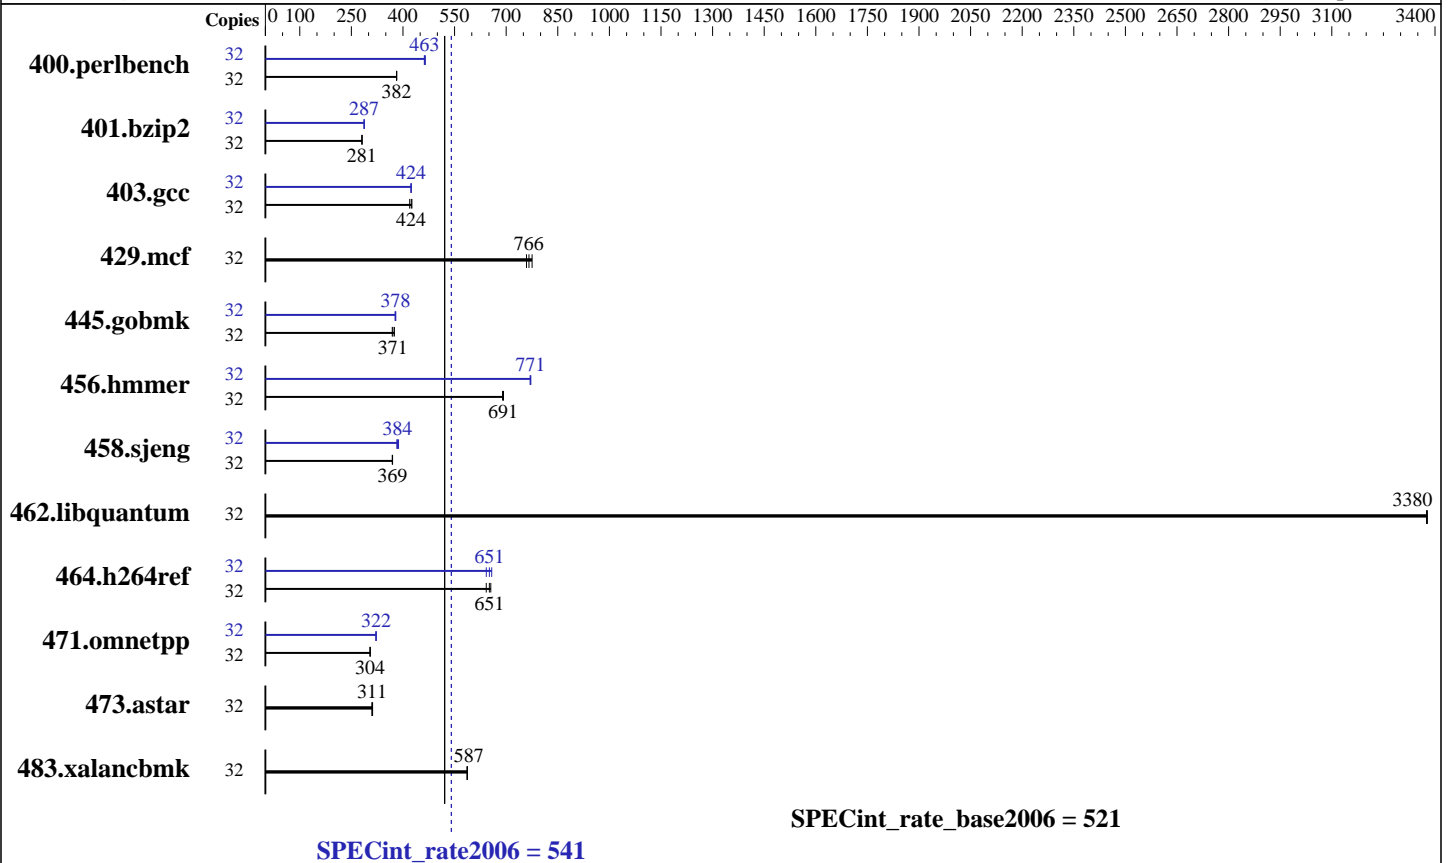

Hardware

CPU Name: Intel Xeon E5-2640 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.11.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 820 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)

SPECint_rate2006 = 541

SPECint_rate_base2006 = 521

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Jan-2005
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	819	382	820	381	<u>819</u>	<u>382</u>	32	<u>675</u>	<u>463</u>	677	462	672	465
401.bzip2	32	1099	281	<u>1100</u>	<u>281</u>	1100	281	32	1075	287	<u>1075</u>	<u>287</u>	1077	287
403.gcc	32	<u>607</u>	<u>424</u>	614	419	605	426	32	607	424	<u>608</u>	<u>424</u>	609	423
429.mcf	32	<u>381</u>	<u>766</u>	384	759	376	775	32	<u>381</u>	<u>766</u>	384	759	376	775
445.gobmk	32	910	369	<u>905</u>	<u>371</u>	895	375	32	885	379	<u>888</u>	<u>378</u>	890	377
456.hammer	32	431	692	<u>432</u>	<u>691</u>	433	689	32	388	770	<u>387</u>	<u>771</u>	387	771
458.sjeng	32	<u>1048</u>	<u>369</u>	1049	369	1047	370	32	1013	382	1000	387	<u>1008</u>	<u>384</u>
462.libquantum	32	196	3380	196	3380	<u>196</u>	<u>3380</u>	32	196	3380	196	3380	<u>196</u>	<u>3380</u>
464.h264ref	32	1103	642	<u>1088</u>	<u>651</u>	1081	655	32	1076	658	<u>1088</u>	<u>651</u>	1103	642
471.omnetpp	32	656	305	657	304	<u>657</u>	<u>304</u>	32	<u>622</u>	<u>322</u>	621	322	622	321
473.astar	32	721	312	725	310	<u>723</u>	<u>311</u>	32	721	312	725	310	<u>723</u>	<u>311</u>
483.xalancbmk	32	376	587	377	586	<u>376</u>	<u>587</u>	32	376	587	377	586	<u>376</u>	<u>587</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings:

System Acoustic and Performance Configuration = Performance
Select Memory RAS Configuration = Maximum Performance
Intel(R) Turbo Boost Technology = Enabled
Processor C3 = Disabled
Processor C6 = Disabled

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Wed Jan 5 18:09:28 2005

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 820 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)

SPECint_rate2006 = 541

SPECint_rate_base2006 = 521

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2005

Hardware Availability: Oct-2013

Software Availability: Sep-2013

Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-2640 v2 @ 2.00GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      132053000 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-358.11.1.el6.x86_64 #1 SMP Tue Nov 19
17:43:04 CET 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 1 03:35

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda1       ext4      193G      51G   133G  28% /

```

```

Additional information from dmidecode:
BIOS Intel Corp. SE5C600.86B.02.03.0003.041920141333 04/19/2014
Memory:
 16x   8 GB
 16x Hynix HMT31GR7EFR4C-RD 8 GB 1867 MHz 2 rank

```

```

(End of data from sysinfo program)
dmidecode does not properly detect memory modules
16 modules of 8 GB were used to run the test (128 GB total)
memory modules operate at speed 1600 MHz while dmidecode shows 1867 MHz

```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 541

ACTINA SOLAR 820 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)

SPECint_rate_base2006 = 521

CPU2006 license: 9008

Test date: Jan-2005

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Binaries compiled on a system with 2x Xeon E5-2650 v2 chips + 256 GB memory
using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 820 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)

SPECint_rate2006 = 541

SPECint_rate_base2006 = 521

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2005

Hardware Availability: Oct-2013

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 541

ACTINA SOLAR 820 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)

SPECint_rate_base2006 = 521

CPU2006 license: 9008

Test date: Jan-2005

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Intel-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 26 18:11:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 August 2014.