



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECint®\_rate2006 = 576

PowerEdge R730 (Intel Xeon E5-2630L v3, 1.80 GHz)

### SPECint\_rate\_base2006 = 556

CPU2006 license: 55


Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

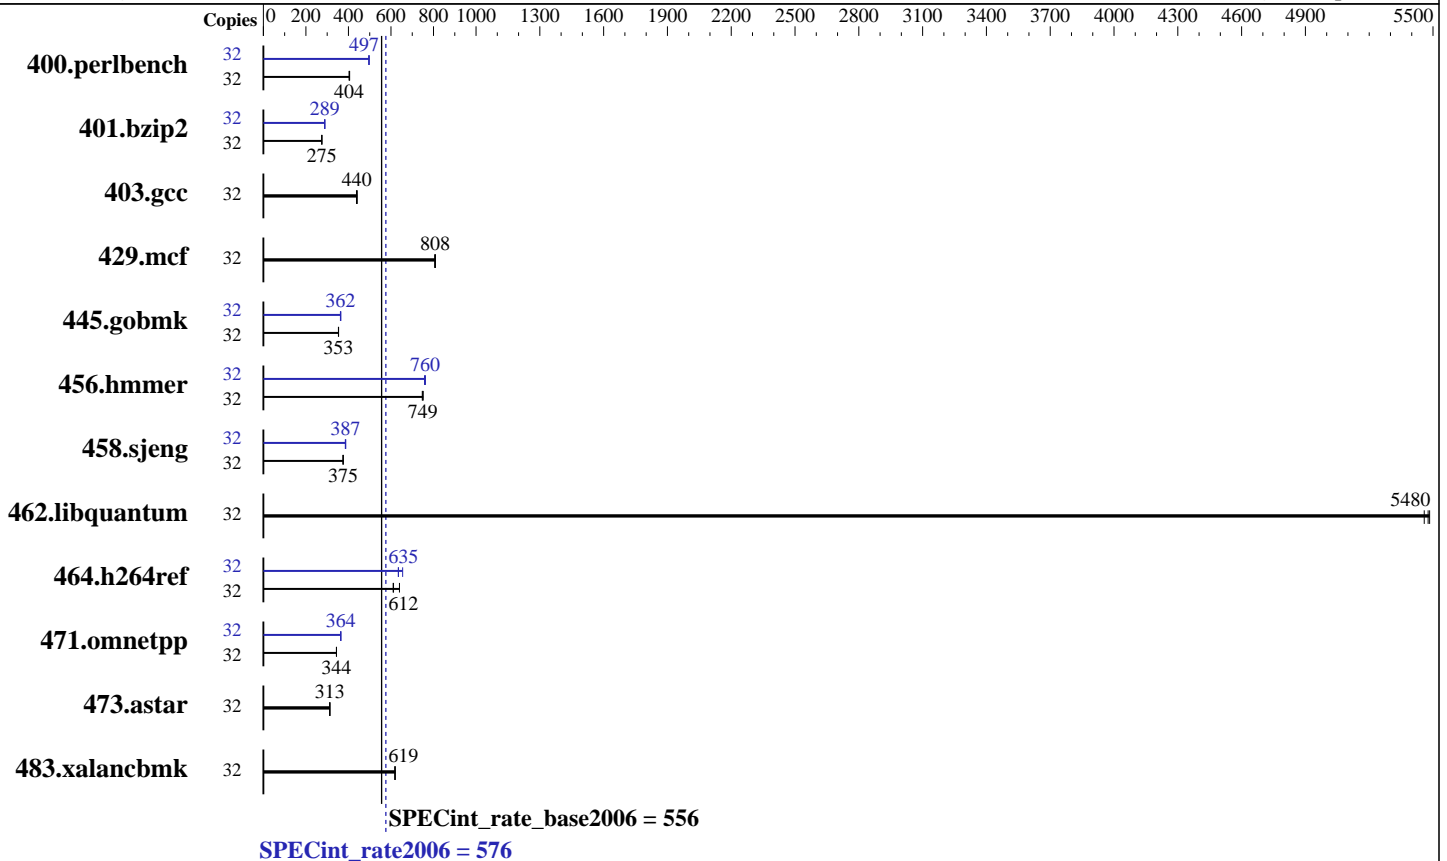

### Hardware

CPU Name: Intel Xeon E5-2630L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 576

PowerEdge R730 (Intel Xeon E5-2630L v3, 1.80 GHz)

SPECint\_rate\_base2006 = 556

CPU2006 license: 55

Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	771	406	<b>774</b>	<b>404</b>	774	404	32	<b>629</b>	<b>497</b>	631	496	628	498
401.bzip2	32	<b>1124</b>	<b>275</b>	1122	275	1125	274	32	<b>1070</b>	<b>289</b>	1069	289	1071	288
403.gcc	32	<b>586</b>	<b>440</b>	584	441	588	438	32	<b>586</b>	<b>440</b>	584	441	588	438
429.mcf	32	<b>361</b>	<b>808</b>	362	805	361	809	32	<b>361</b>	<b>808</b>	362	805	361	809
445.gobmk	32	<b>950</b>	<b>353</b>	949	354	951	353	32	<b>926</b>	<b>362</b>	921	365	926	362
456.hammer	32	397	751	400	747	<b>398</b>	<b>749</b>	32	<b>393</b>	<b>760</b>	392	762	394	758
458.sjeng	32	1031	375	<b>1032</b>	<b>375</b>	1034	374	32	1005	385	1001	387	<b>1001</b>	<b>387</b>
462.libquantum	32	121	5480	121	5460	<b>121</b>	<b>5480</b>	32	121	5480	121	5460	<b>121</b>	<b>5480</b>
464.h264ref	32	<b>1157</b>	<b>612</b>	1160	610	1107	640	32	1116	635	<b>1115</b>	<b>635</b>	1081	655
471.omnetpp	32	<b>582</b>	<b>344</b>	582	343	582	344	32	<b>550</b>	<b>364</b>	550	363	549	365
473.astar	32	718	313	<b>718</b>	<b>313</b>	721	312	32	718	313	<b>718</b>	<b>313</b>	721	312
483.xalancbmk	32	<b>357</b>	<b>619</b>	357	618	356	620	32	<b>357</b>	<b>619</b>	357	618	356	620

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Snoop Mode set to Early Snoop  
 Virtualization Technology disabled  
 Execute Disable disabled  
 System Profile set to Performance  
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on linux Fri Jul 18 15:46:43 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) CPU E5-2630L v3 @ 1.80GHz  
 2 "physical id"s (chips)  
 32 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 576**

PowerEdge R730 (Intel Xeon E5-2630L v3, 1.80 GHz)

**SPECint\_rate\_base2006 = 556**

**CPU2006 license:** 55

**Test date:** Jul-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      264572220 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

uname -a:

```
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 18 15:31 last=S

SPEC is set to: /root/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  267G  8.8G  257G   4% /
```

Additional information from dmidecode:

```
BIOS Dell Inc. 0.3.24 06/12/2014
Memory:
1x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 1866 MHz
8x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 1866 MHz
7x 00CE00B300CE M393A2G40DB0-CPB 16 GB 1866 MHz
8x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org  
http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 576**

PowerEdge R730 (Intel Xeon E5-2630L v3,  
1.80 GHz)

**SPECint\_rate\_base2006 = 556**

**CPU2006 license:** 55

**Test date:** Jul-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## General Notes (Continued)

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarthearp

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R730 (Intel Xeon E5-2630L v3,  
1.80 GHz)

**SPECint\_rate2006 = 576**

**SPECint\_rate\_base2006 = 556**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 576**

PowerEdge R730 (Intel Xeon E5-2630L v3, 1.80 GHz)

**SPECint\_rate\_base2006 = 556**

**CPU2006 license:** 55

**Test date:** Jul-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Oct 27 15:25:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2014.