



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint®\_rate2006 = 437

Express5800/E120f-M (Intel Xeon E5-2650L v3)

SPECint\_rate\_base2006 = 418

CPU2006 license: 9006


Test date: Jan-2015

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

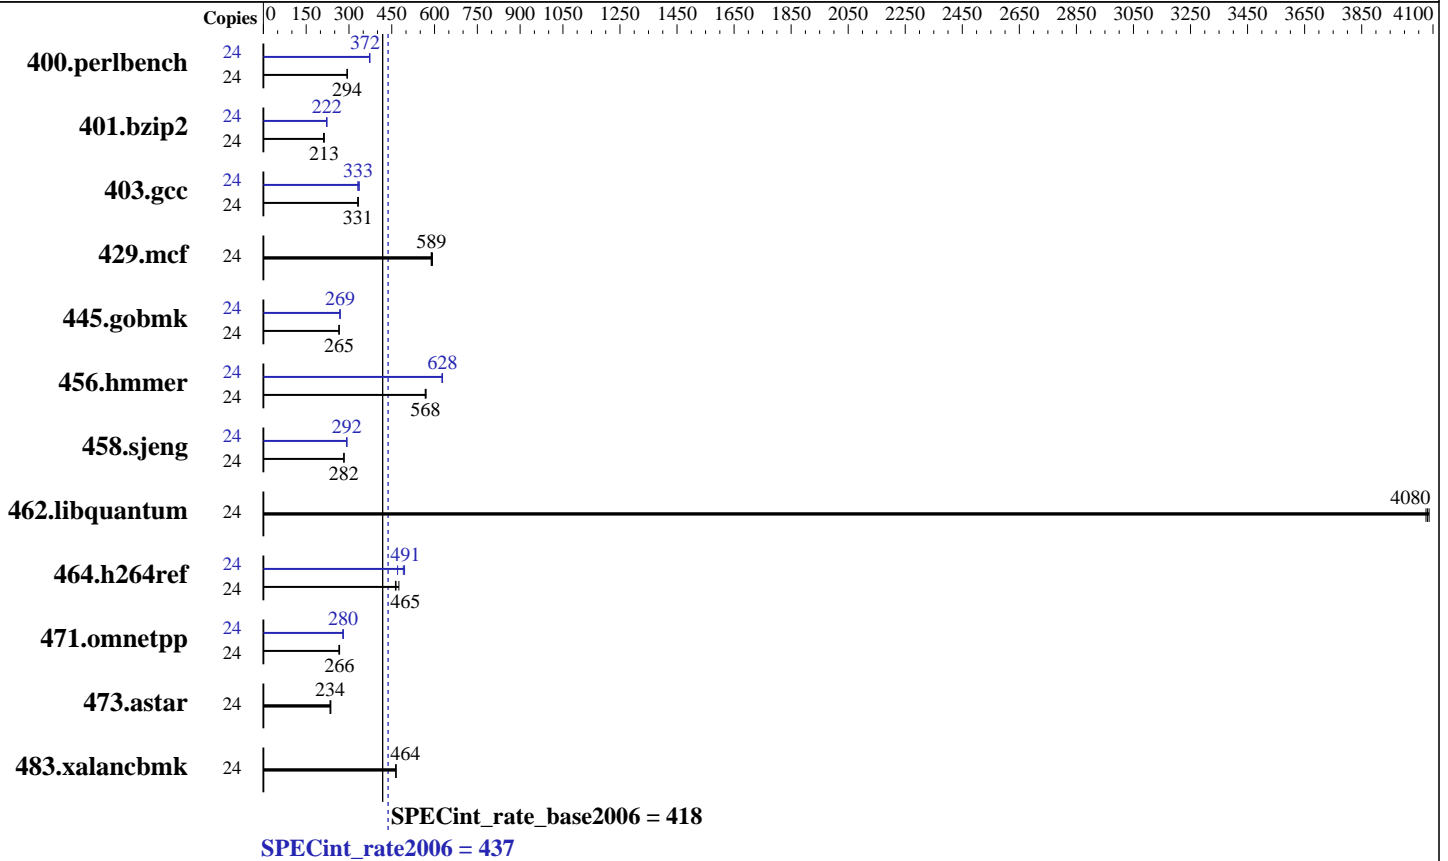

### Hardware

CPU Name: Intel Xeon E5-2650L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 1 chip, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Kernel 2.6.32-431.20.3.el6.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint\_rate2006 = 437

Express5800/E120f-M (Intel Xeon E5-2650L v3)

SPECint\_rate\_base2006 = 418

CPU2006 license: 9006

Test date: Jan-2015

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	799	294	<b>798</b>	<b>294</b>	797	294	24	630	372	628	373	<b>630</b>	<b>372</b>
401.bzip2	24	1098	211	1087	213	<b>1087</b>	<b>213</b>	24	1040	223	1045	222	<b>1043</b>	<b>222</b>
403.gcc	24	584	331	580	333	<b>583</b>	<b>331</b>	24	574	336	<b>581</b>	<b>333</b>	583	331
429.mcf	24	<b>371</b>	<b>589</b>	372	588	369	593	24	<b>371</b>	<b>589</b>	372	588	369	593
445.gobmk	24	<b>949</b>	<b>265</b>	949	265	949	265	24	938	268	936	269	<b>937</b>	<b>269</b>
456.hammer	24	392	571	394	568	<b>394</b>	<b>568</b>	24	358	626	<b>357</b>	<b>628</b>	357	628
458.sjeng	24	<b>1028</b>	<b>282</b>	1029	282	1028	283	24	<b>993</b>	<b>292</b>	994	292	993	293
462.libquantum	24	122	4080	<b>122</b>	<b>4080</b>	122	4090	24	122	4080	<b>122</b>	<b>4080</b>	122	4090
464.h264ref	24	<b>1142</b>	<b>465</b>	1118	475	1147	463	24	<b>1083</b>	<b>491</b>	1073	495	1129	471
471.omnetpp	24	561	267	<b>563</b>	<b>266</b>	567	265	24	538	279	535	280	<b>536</b>	<b>280</b>
473.astar	24	719	234	712	237	<b>719</b>	<b>234</b>	24	719	234	712	237	<b>719</b>	<b>234</b>
483.xalancbmk	24	<b>357</b>	<b>464</b>	356	465	357	464	24	<b>357</b>	<b>464</b>	356	465	357	464

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Power Management Policy: Custom  
Energy Performance: Performance  
Patrol Scrub: Disabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 437

Express5800/E120f-M (Intel Xeon E5-2650L v3)

SPECint\_rate\_base2006 = 418

CPU2006 license: 9006

Test date: Jan-2015

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 437

Express5800/E120f-M (Intel Xeon E5-2650L v3)

SPECint\_rate\_base2006 = 418

CPU2006 license: 9006

Test date: Jan-2015

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
429.mcf: basepeak = yes  
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 437

Express5800/E120f-M (Intel Xeon E5-2650L v3)

SPECint\_rate\_base2006 = 418

CPU2006 license: 9006

Test date: Jan-2015

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Peak Optimization Flags (Continued)

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 10 16:02:08 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 March 2015.