



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5029S-TN2
(X11SSV-Q , Intel Core i5-6400)

SPECint®_rate2006 = 185

SPECint_rate_base2006 = 180

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Sep-2014

Software Availability: Oct-2014

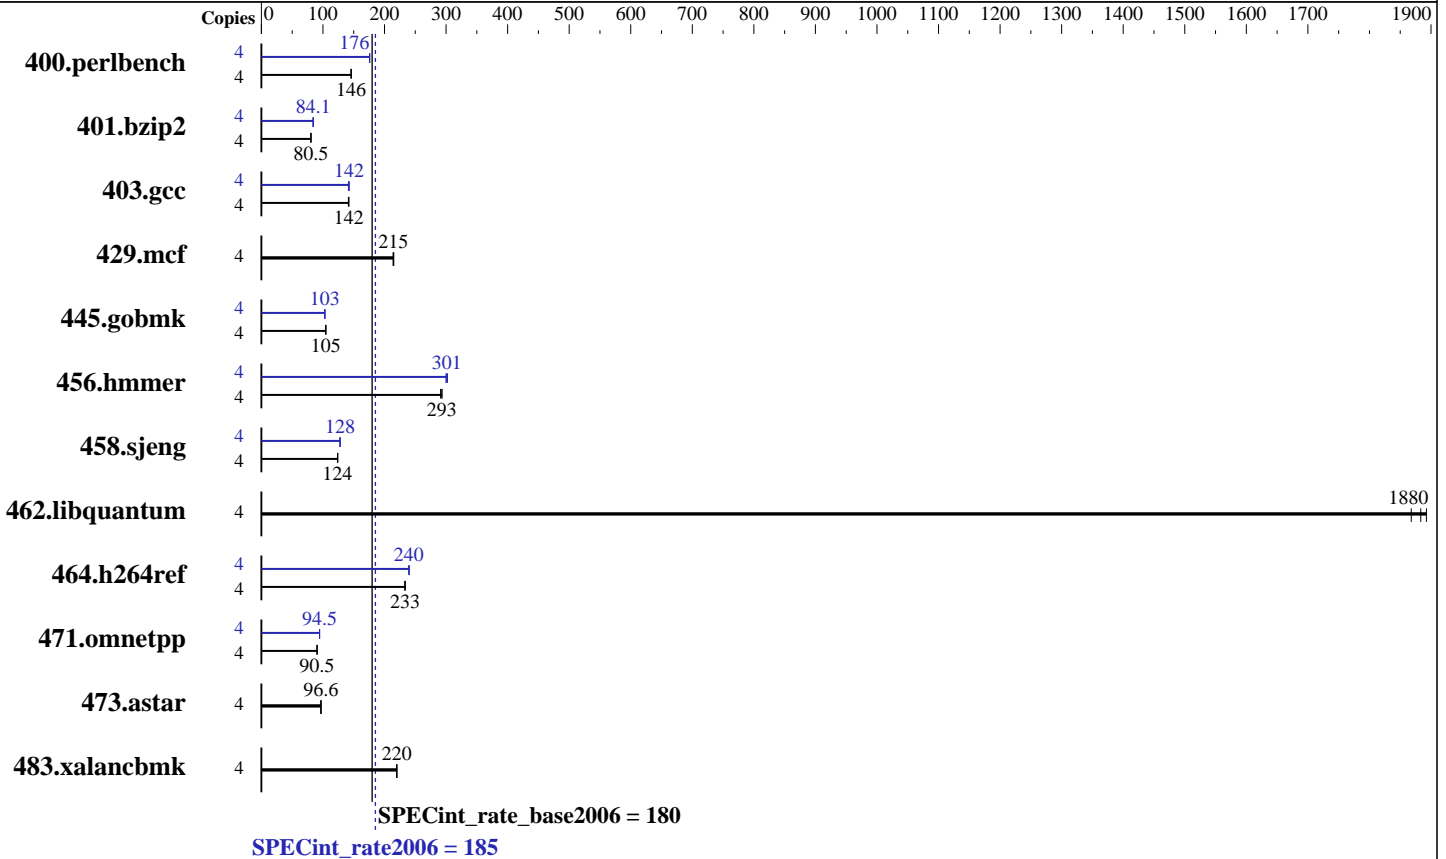

Hardware

CPU Name: Intel Core i5-6400
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC4-2133P-U)
 Disk Subsystem: 1 x 750 GB SATA III, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5029S-TN2
(X11SSV-Q , Intel Core i5-6400)

SPECint_rate2006 = 185

SPECint_rate_base2006 = 180

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2015
Hardware Availability: Sep-2014
Software Availability: Oct-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	267	146	<u>268</u>	<u>146</u>	268	146	4	<u>222</u>	<u>176</u>	222	176	222	176
401.bzip2	4	479	80.6	480	80.4	<u>479</u>	<u>80.5</u>	4	459	84.0	<u>459</u>	<u>84.1</u>	458	84.3
403.gcc	4	228	141	<u>227</u>	<u>142</u>	226	142	4	<u>226</u>	<u>142</u>	226	143	228	141
429.mcf	4	<u>170</u>	<u>215</u>	171	214	170	215	4	<u>170</u>	<u>215</u>	171	214	170	215
445.gobmk	4	400	105	<u>401</u>	<u>105</u>	402	104	4	407	103	407	103	<u>407</u>	<u>103</u>
456.hammer	4	128	291	127	293	<u>127</u>	<u>293</u>	4	<u>124</u>	<u>301</u>	124	300	123	302
458.sjeng	4	391	124	<u>391</u>	<u>124</u>	391	124	4	379	128	379	128	<u>379</u>	<u>128</u>
462.libquantum	4	<u>44.0</u>	<u>1880</u>	43.8	1890	44.4	1870	4	<u>44.0</u>	<u>1880</u>	43.8	1890	44.4	1870
464.h264ref	4	379	234	380	233	<u>379</u>	<u>233</u>	4	370	240	369	240	<u>369</u>	<u>240</u>
471.omnetpp	4	<u>276</u>	<u>90.5</u>	276	90.4	276	90.5	4	264	94.6	<u>264</u>	<u>94.5</u>	265	94.4
473.astar	4	<u>291</u>	<u>96.6</u>	289	97.1	291	96.6	4	<u>291</u>	<u>96.6</u>	289	97.1	291	96.6
483.xalancbmk	4	<u>125</u>	<u>220</u>	125	220	126	220	4	<u>125</u>	<u>220</u>	125	220	126	220

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Tue Nov 10 01:25:22 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Core(TM) i5-6400 CPU @ 2.70GHz
1 "physical id"s (chips)
4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5029S-TN2
(X11SSV-Q, Intel Core i5-6400)

SPECint_rate2006 = 185

SPECint_rate_base2006 = 180

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2015
Hardware Availability: Sep-2014
Software Availability: Oct-2014

Platform Notes (Continued)

physical 0: cores 0 1 2 3
cache size : 6144 KB

From /proc/meminfo
MemTotal: 16035188 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 9 15:30

SPEC is set to: /home/cpu2006
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 216G 6.9G 210G 4% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0a 11/03/2015
Memory:
2x Samsung M471A1G43DB0-CPB 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5029S-TN2
(X11SSV-Q , Intel Core i5-6400)

SPECint_rate2006 = 185

SPECint_rate_base2006 = 180

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2015
Hardware Availability: Sep-2014
Software Availability: Oct-2014

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
C++ benchmarks:
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
400.perlbench: icc -m64
401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5029S-TN2
(X11SSV-Q , Intel Core i5-6400)

SPECint_rate2006 = 185

SPECint_rate_base2006 = 180

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2015
Hardware Availability: Sep-2014
Software Availability: Oct-2014

Peak Compiler Invocation (Continued)

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5029S-TN2
(X11SSV-Q , Intel Core i5-6400)

SPECint_rate2006 = 185

SPECint_rate_base2006 = 180

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2015
Hardware Availability: Sep-2014
Software Availability: Oct-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 1 17:41:38 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 December 2015.