



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint®\_rate2006 = 3430

Lenovo System x3850 X6  
(Intel Xeon E7-8880 v4, 2.20 GHz)

SPECint\_rate\_base2006 = 3300

CPU2006 license: 9017


Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

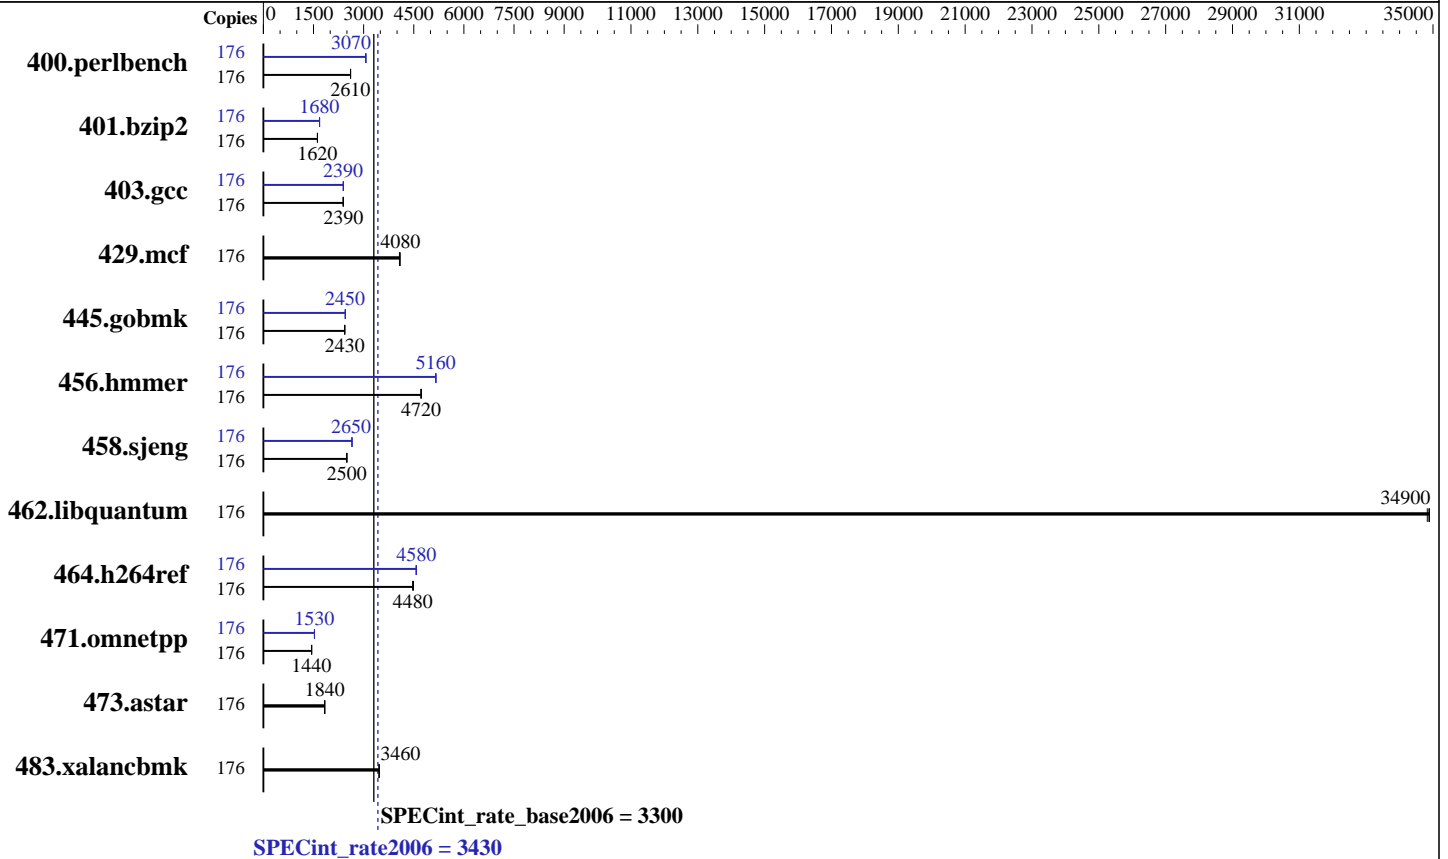

### Hardware

CPU Name: Intel Xeon E7-8880 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 88 cores, 4 chips, 22 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 55 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
 Disk Subsystem: 1 x 800 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux  
 Auto Parallel: No  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 3430

Lenovo System x3850 X6  
(Intel Xeon E7-8880 v4, 2.20 GHz)

SPECint\_rate\_base2006 = 3300

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	176	660	2610	<b>659</b>	<b>2610</b>	659	2610	176	562	3060	560	3070	<b>561</b>	<b>3070</b>
401.bzip2	176	1052	1610	1048	1620	<b>1049</b>	<b>1620</b>	176	1012	1680	1009	1680	<b>1011</b>	<b>1680</b>
403.gcc	176	592	2400	595	2380	<b>592</b>	<b>2390</b>	176	591	2400	593	2390	<b>593</b>	<b>2390</b>
429.mcf	176	392	4090	<b>393</b>	<b>4080</b>	394	4070	176	392	4090	<b>393</b>	<b>4080</b>	394	4070
445.gobmk	176	758	2430	<b>758</b>	<b>2430</b>	758	2440	176	753	2450	754	2450	<b>754</b>	<b>2450</b>
456.hammer	176	<b>348</b>	<b>4720</b>	347	4730	349	4710	176	318	5160	318	5170	<b>318</b>	<b>5160</b>
458.sjeng	176	853	2500	853	2500	<b>853</b>	<b>2500</b>	176	802	2650	804	2650	<b>803</b>	<b>2650</b>
462.libquantum	176	105	34800	<b>105</b>	<b>34900</b>	105	34900	176	105	34800	<b>105</b>	<b>34900</b>	105	34900
464.h264ref	176	<b>870</b>	<b>4480</b>	872	4470	867	4490	176	<b>851</b>	<b>4580</b>	853	4570	851	4580
471.omnetpp	176	762	1440	<b>762</b>	<b>1440</b>	761	1440	176	719	1530	720	1530	<b>720</b>	<b>1530</b>
473.astar	176	<b>673</b>	<b>1840</b>	673	1840	673	1840	176	<b>673</b>	<b>1840</b>	673	1840	673	1840
483.xalancbmk	176	<b>351</b>	<b>3460</b>	351	3460	350	3470	176	<b>351</b>	<b>3460</b>	351	3460	350	3470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches

## Platform Notes

BIOS configuration:  
Memory Mode set to Independent  
Operating Mode set to Maximum Performance  
DCU Streamer Prefetcher set to Disable  
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on Draco Thu Jan 12 22:25:52 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 3430

Lenovo System x3850 X6  
(Intel Xeon E7-8880 v4, 2.20 GHz)

SPECint\_rate\_base2006 = 3300

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

### Platform Notes (Continued)

model name : Intel(R) Xeon(R) CPU E7-8880 v4 @ 2.20GHz

4 "physical id"s (chips)

176 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 22

siblings : 44

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

cache size : 28160 KB

From /proc/meminfo

MemTotal: 529149876 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 1

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION\_ID="12.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux Draco 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jan 12 16:01

SPEC is set to: /home/cpu2006-1.2-ic17.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	744G	6.2G	735G	1%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 3430**

Lenovo System x3850 X6  
(Intel Xeon E7-8880 v4, 2.20 GHz)

**SPECint\_rate\_base2006 = 3300**

**CPU2006 license:** 9017

**Test date:** Jan-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2016

## Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[A9E135LUS-3.11]- 11/18/2016

Memory:

30x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1600 MHz

2x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1600 MHz

64x NO DIMM Unknown

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint\_rate2006 = 3430

Lenovo System x3850 X6  
(Intel Xeon E7-8880 v4, 2.20 GHz)

SPECint\_rate\_base2006 = 3300

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint\_rate2006 = 3430

Lenovo System x3850 X6  
(Intel Xeon E7-8880 v4, 2.20 GHz)

SPECint\_rate\_base2006 = 3300

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto-ilp32  
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)  
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 3430**

Lenovo System x3850 X6  
(Intel Xeon E7-8880 v4, 2.20 GHz)

**SPECint\_rate\_base2006 = 3300**

**CPU2006 license:** 9017

**Test date:** Jan-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2016

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 7 17:00:49 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 February 2017.