



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro


SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

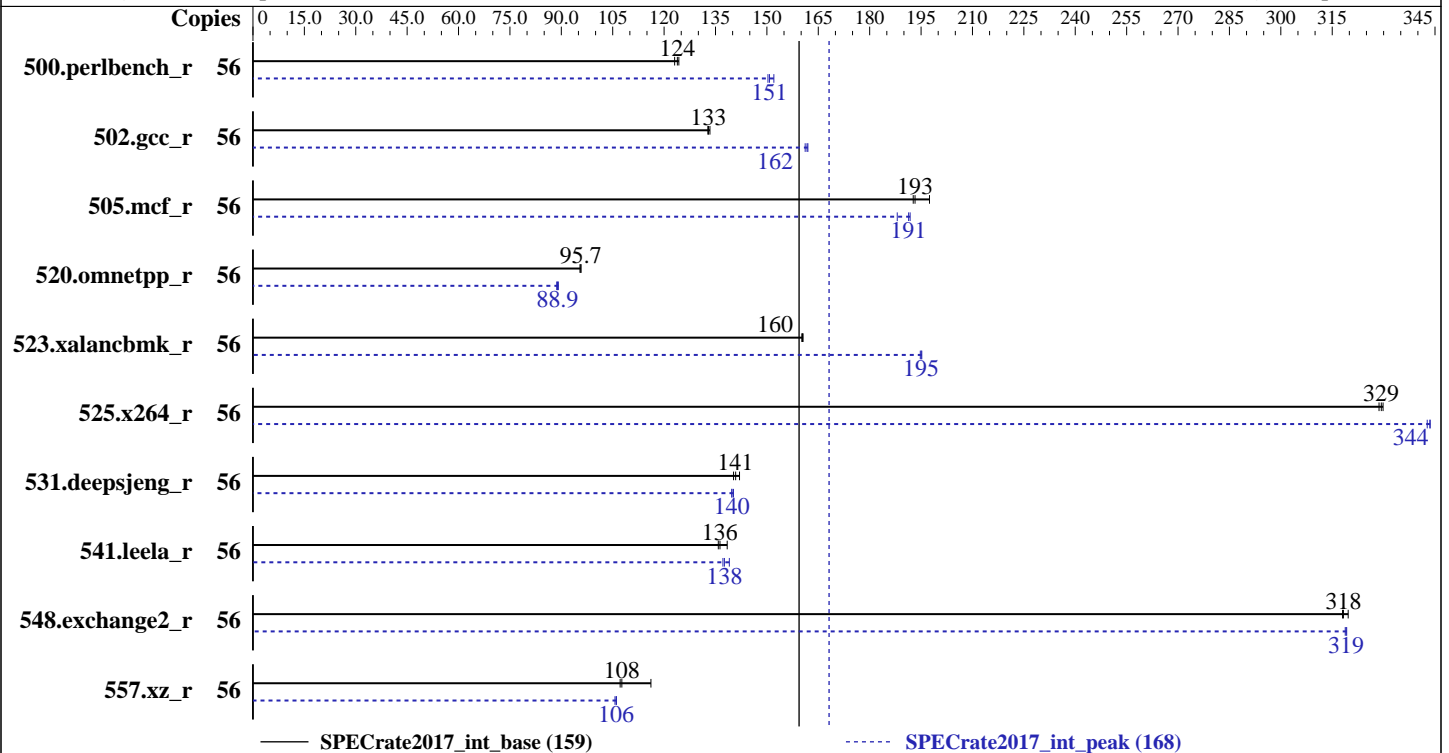

Hardware

CPU Name: Intel Xeon Gold 6132
Max MHz.: 3700
Nominal: 2600
Enabled: 28 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 19.25 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 1.92 TB SATA 3 SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
4.4.114-92.64-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Supermicro BIOS version 2.0b released Feb-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	56	720	124	724	123	717	124	56	586	152	593	150	591	151
502.gcc_r	56	595	133	597	133	596	133	56	490	162	492	161	490	162
505.mcf_r	56	458	197	468	193	470	193	56	472	192	481	188	473	191
520.omnetpp_r	56	770	95.4	768	95.7	768	95.7	56	824	89.1	829	88.7	827	88.9
523.xalancbmk_r	56	368	161	369	160	369	160	56	304	195	303	195	303	195
525.x264_r	56	297	330	298	329	298	329	56	286	343	285	344	285	344
531.deepsjeng_r	56	452	142	456	141	458	140	56	459	140	459	140	458	140
541.leela_r	56	670	138	683	136	680	136	56	676	137	674	138	667	139
548.exchange2_r	56	461	318	459	320	461	318	56	460	319	460	319	460	319
557.xz_r	56	521	116	562	108	564	107	56	572	106	571	106	570	106

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2k17/lib/ia32:/home/cpu2k17/lib/intel64:/home/cpu2k17/je5.0.1-32:/home/cpu2k17/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

<https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:
CPU Virtualization = Disable
SNC = Enable
Stale AtoS = Enable
LLC dead line alloc = Disable
IMC Interleaving = 1-way Interleave
Patrol Scrub = Disable
Sysinfo program /home/cpu2k17/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-itxo Sat Mar 24 18:11:31 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
2 "physical id"s (chips)
56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 14
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 56
On-line CPU(s) list: 0-55
Thread(s) per core: 2
Core(s) per socket: 14
Socket(s): 2

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
Stepping:             4
CPU MHz:              1000.000
CPU max MHz:          2601.0000
CPU min MHz:          1000.0000
BogoMIPS:             5199.98
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             19712K
NUMA node0 CPU(s):   0-3,7-9,28-31,35-37
NUMA node1 CPU(s):   4-6,10-13,32-34,38-41
NUMA node2 CPU(s):   14-17,21-23,42-45,49-51
NUMA node3 CPU(s):   18-20,24-27,46-48,52-55
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 28 29 30 31 35 36 37
node 0 size: 95330 MB
node 0 free: 95066 MB
node 1 cpus: 4 5 6 10 11 12 13 32 33 34 38 39 40 41
node 1 size: 96753 MB
node 1 free: 96499 MB
node 2 cpus: 14 15 16 17 21 22 23 42 43 44 45 49 50 51
node 2 size: 96753 MB
node 2 free: 96467 MB
node 3 cpus: 18 19 20 24 25 26 27 46 47 48 52 53 54 55
node 3 size: 96750 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```
node 3 free: 96516 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      394841696 kB
HugePages_Total:      0
Hugepagesize:      2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 12 SP2
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-itxo 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 24 18:10 last=5

SPEC is set to: /home/cpu2k17

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   1.8T  133G  1.6T   8% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS American Megatrends Inc. 2.0b 02/24/2018

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Platform Notes (Continued)

Memory:

5x Micron Technology 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666
7x Micron Technology 36ASF4G72PZ-2G6H1R 32 GB 2 rank 2666
4x NO DIMM NO DIMM

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalanbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6132)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 168

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Peak Other Flags (Continued)

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):
-m64

523.xalancbmk_r: -m32

Fortran benchmarks:
-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-03-24 21:11:31-0400.

Report generated on 2018-10-31 17:47:40 by CPU2017 PDF formatter v6067.

Originally published on 2018-04-17.