



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Bronze 3104, 1.70GHz

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2018

Hardware Availability: Dec-2017

Software Availability: Mar-2018

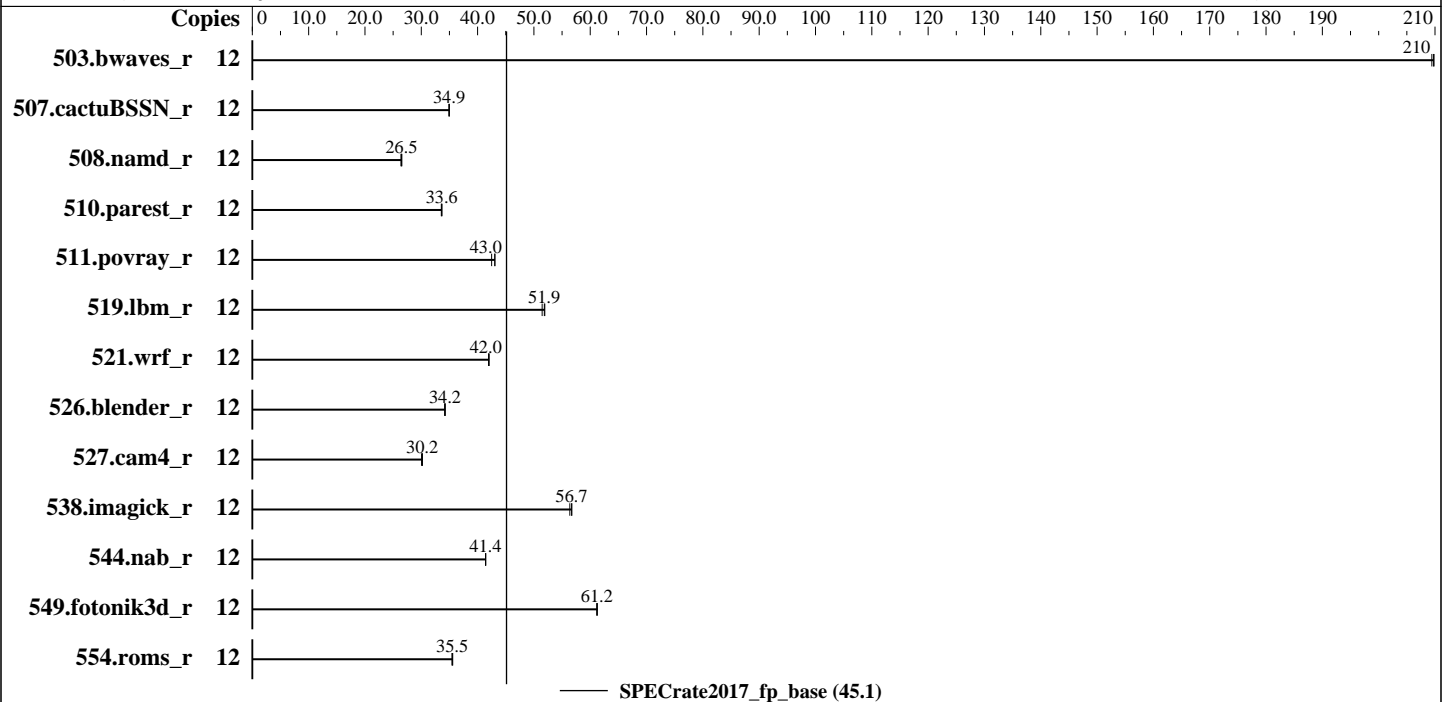

Hardware

CPU Name: Intel Xeon Bronze 3104
 Max MHz.: 1700
 Nominal: 1700
 Enabled: 12 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 8.25 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (12 x 16 GB 2Rx4 PC4-2666V-R, running at 2133)
 Storage: 1 x SATA SSD, 960 GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.114-92.64-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.27.0 for D3853-A1x. Released Mar-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Bronze 3104,
1.70GHz

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2018
Hardware Availability: Dec-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	12	574	210	575	209	574	210							
507.cactuBSSN_r	12	435	34.9	435	34.9	434	35.0							
508.namd_r	12	432	26.4	429	26.5	430	26.5							
510.parest_r	12	933	33.6	935	33.6	933	33.7							
511.povray_r	12	659	42.5	651	43.0	650	43.1							
519.lbm_r	12	244	51.9	246	51.5	244	51.9							
521.wrf_r	12	641	42.0	640	42.0	640	42.0							
526.blender_r	12	534	34.2	535	34.2	534	34.2							
527.cam4_r	12	698	30.0	696	30.2	695	30.2							
538.imagick_r	12	529	56.4	526	56.7	526	56.7							
544.nab_r	12	487	41.4	488	41.4	487	41.4							
549.fotonik3d_r	12	764	61.2	764	61.2	764	61.2							
554.roms_r	12	536	35.6	538	35.5	537	35.5							

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter: nohz_full=1-11
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017/lib/ia32:/home/Benchmark/speccpu2017/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017/je5.0.1-32"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017/je5.0.1-64"

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Bronze 3104, 1.70GHz

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2018
Hardware Availability: Dec-2017
Software Availability: Mar-2018

General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
DCU Streamer Prefetcher = Disabled
Intel Virtualization Technology = Disabled
Power Technology = Custom
HWPM Support = Disabled
Uncore Frequency Scaling = Disabled
Sub NUMA Clustering = Disabled
Stale AtoS = Enabled
LLC dead line alloc = Disabled
Sysinfo program /home/Benchmark/speccpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on CX2550M4 Thu Apr 12 00:50:08 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
2 "physical id"s (chips)
12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Bronze 3104, 1.70GHz

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2018
Hardware Availability: Dec-2017
Software Availability: Mar-2018

Platform Notes (Continued)

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               12
On-line CPU(s) list:  0-11
Thread(s) per core:   1
Core(s) per socket:   6
Socket(s):            2
NUMA node(s):        2
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
Stepping:             4
CPU MHz:              1700.000
CPU max MHz:          1700.0000
CPU min MHz:          800.0000
BogoMIPS:             3392.02
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            1024K
L3 cache:            8448K
NUMA node0 CPU(s):   0-5
NUMA node1 CPU(s):   6-11

```

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 8448 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 95377 MB
node 0 free: 95063 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Bronze 3104,
1.70GHz

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2018
Hardware Availability: Dec-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```
node 1 cpus: 6 7 8 9 10 11
node 1 size: 96645 MB
node 1 free: 96361 MB
node distances:
node 0 1
  0: 10 21
  1: 21 10
```

```
From /proc/meminfo
MemTotal:      196631420 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux CX2550M4 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 11 19:43
```

```
SPEC is set to: /home/Benchmark/speccpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   852G  17G  836G  2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU V1.0.0.0 R1.27.0 for D3853-A1x 03/15/2018
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Bronze 3104,
1.70GHz

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2018
Hardware Availability: Dec-2017
Software Availability: Mar-2018

Platform Notes (Continued)

Memory:

12x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666, configured at 2133
4x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Bronze 3104,
1.70GHz

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2018
Hardware Availability: Dec-2017
Software Availability: Mar-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Bronze 3104,
1.70GHz

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2018
Hardware Availability: Dec-2017
Software Availability: Mar-2018

Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Bronze 3104,
1.70GHz

SPECrate2017_fp_base = 45.1

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2018

Hardware Availability: Dec-2017

Software Availability: Mar-2018

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-04-11 11:50:07-0400.

Report generated on 2018-10-31 18:09:15 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-16.