



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

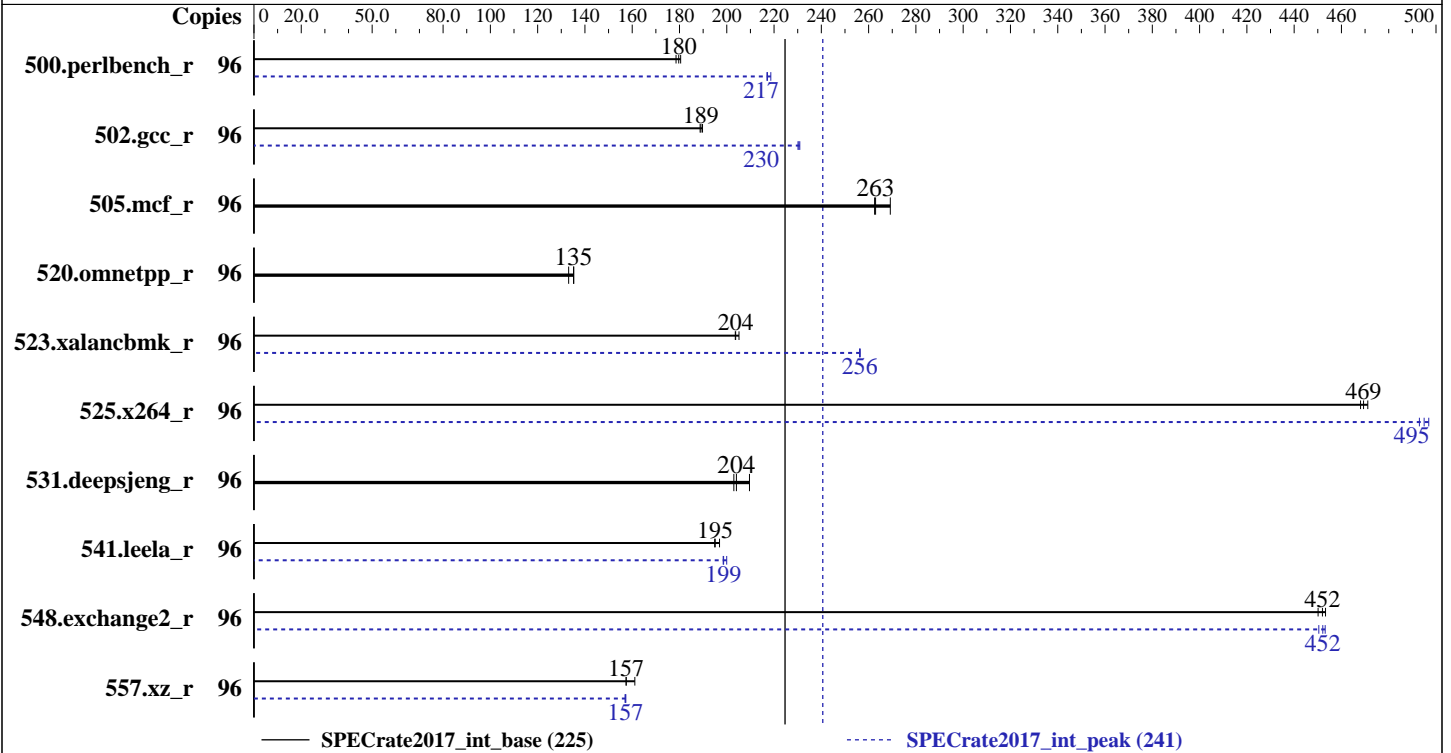

### Hardware

CPU Name: Intel Xeon Platinum 8160  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 1 TB SATA, 7200 RPM  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Kernel 3.10.0-693.21.1.el7.x86\_64  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version F21 02/22/2018 released Apr-2018  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: May-2018  
Hardware Availability: Jan-2018  
Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	847	180	<b>851</b>	<b>180</b>	856	179	96	699	219	704	217	<b>704</b>	<b>217</b>
502.gcc_r	96	<b>719</b>	<b>189</b>	716	190	720	189	96	589	231	<b>590</b>	<b>230</b>	591	230
505.mcf_r	96	576	269	591	263	<b>590</b>	<b>263</b>	96	576	269	591	263	<b>590</b>	<b>263</b>
520.omnetpp_r	96	931	135	<b>932</b>	<b>135</b>	946	133	96	931	135	<b>932</b>	<b>135</b>	946	133
523.xalancbmk_r	96	494	205	<b>498</b>	<b>204</b>	498	204	96	395	256	396	256	<b>395</b>	<b>256</b>
525.x264_r	96	357	471	359	468	<b>358</b>	<b>469</b>	96	338	497	341	493	<b>340</b>	<b>495</b>
531.deepsjeng_r	96	525	210	<b>539</b>	<b>204</b>	542	203	96	525	210	<b>539</b>	<b>204</b>	542	203
541.leela_r	96	807	197	816	195	<b>815</b>	<b>195</b>	96	795	200	<b>800</b>	<b>199</b>	801	198
548.exchange2_r	96	559	450	555	453	<b>557</b>	<b>452</b>	96	558	450	<b>556</b>	<b>452</b>	555	453
557.xz_r	96	644	161	<b>658</b>	<b>157</b>	659	157	96	<b>660</b>	<b>157</b>	660	157	659	157

SPECrate2017\_int\_base = 225

SPECrate2017\_int\_peak = 241

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default

Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:

ENERGY\_PERF\_BIAS\_CFG mode: Performance

SNC: Enable

IMC Interleaving: 1-way Interleave

Stale AtoS: Enable

LLC dead line alloc: Disable

Patrol Scrub: Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on dl20h Wed May 9 16:50:43 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 2

NUMA node(s): 4

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

### Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
Stepping:           4
CPU MHz:            1635.292
CPU max MHz:        3700.0000
CPU min MHz:        1000.0000
BogoMIPS:           4200.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           33792K
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,48-50,54-56,60-62,66-68
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,51-53,57-59,63-65,69-71
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,72-74,78-80,84-86,90-92
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,75-77,81-83,87-89,93-95
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 48 49 50 54 55 56 60 61 62 66 67 68
node 0 size: 96931 MB
node 0 free: 94349 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 51 52 53 57 58 59 63 64 65 69 70 71
node 1 size: 98304 MB
node 1 free: 95917 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 72 73 74 78 79 80 84 85 86 90 91 92
node 2 size: 98304 MB
node 2 free: 95735 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 75 76 77 81 82 83 87 88 89 93 94 95
node 3 size: 98304 MB

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2018  
**Hardware Availability:** Jan-2018  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```
node 3 free: 95975 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10
```

```
From /proc/meminfo
MemTotal:      394643472 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux dl20h 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 9 16:45
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  909G  319G  544G  37% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS GIGABYTE F21 02/22/2018
Memory:
4x NO DIMM NO DIMM
1x SK Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666
11x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2018  
**Hardware Availability:** Jan-2018  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(peak) 523.xalanbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** May-2018

**Hardware Availability:** Jan-2018

**Software Availability:** Mar-2018

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-fno-strict-overflow -L/usr/local/je5.0.1-64/lib

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

-ljemalloc

502.gcc\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -fno-alias

-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib

-ljemalloc

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: basepeak = yes

541.leela\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017\_int\_base = 225

Express5800/D120h (Intel Xeon Platinum 8160)

SPECrate2017\_int\_peak = 241

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Peak Other Flags (Continued)

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk\_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-05-09 03:50:43-0400.

Report generated on 2018-10-31 17:17:57 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-29.