



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology


ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECspeed2017_fp_base = 104

SPECspeed2017_fp_peak = 105

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Feb-2018

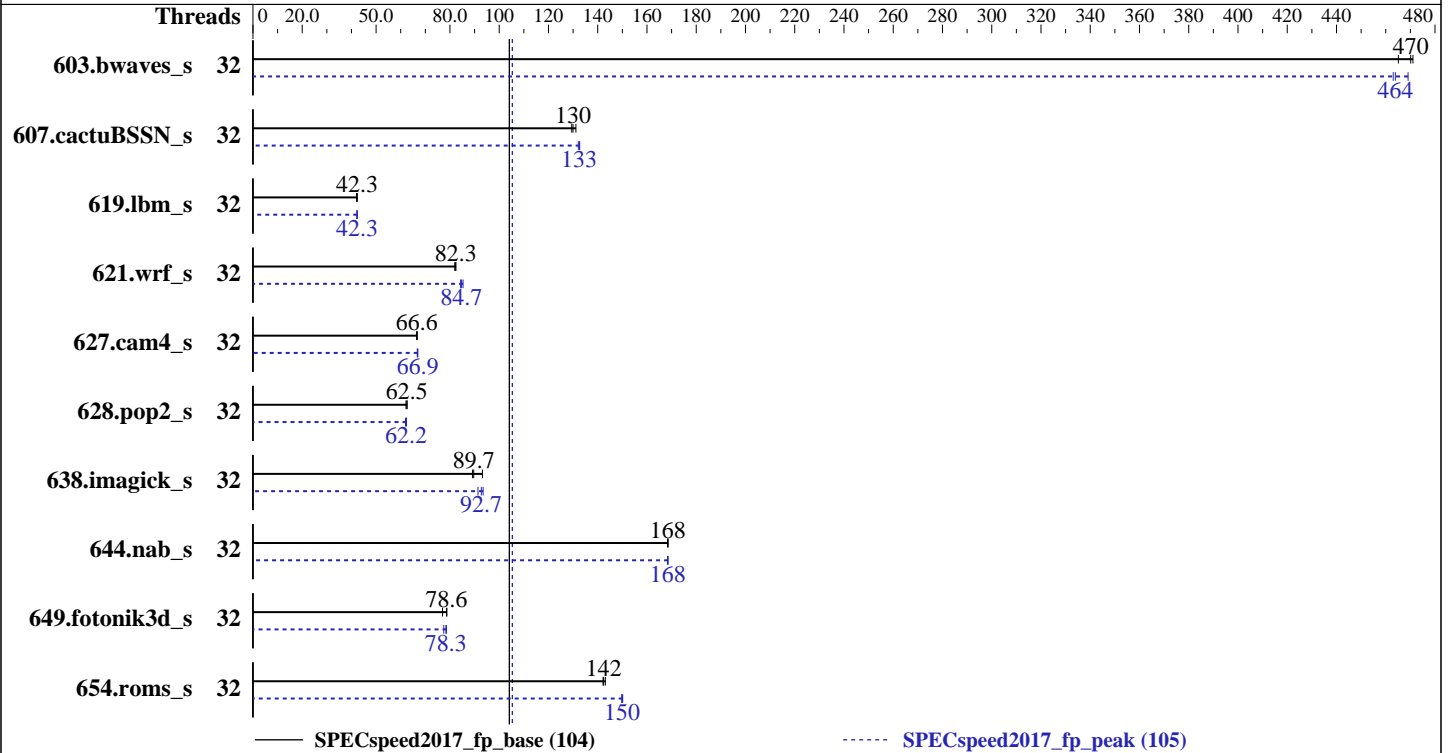

Hardware

CPU Name: Intel Xeon Gold 6130
Max MHz.: 3700
Nominal: 2100
Enabled: 32 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 22 MB I+D on chip per chip
Other: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Storage: 1 x 800 GB SAS SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
Kernel 4.4.114-92.64-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: Yes
Firmware: Lenovo BIOS Version IVE113W 1.12 released Feb-2018
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECSpeed2017_fp_base = 104

ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECSpeed2017_fp_peak = 105

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	125	471	127	465	<u>125</u>	<u>470</u>	32	<u>127</u>	<u>464</u>	127	463	126	469
607.cactuBSSN_s	32	129	129	<u>128</u>	<u>130</u>	127	131	32	126	133	<u>126</u>	<u>133</u>	126	132
619.lbm_s	32	124	42.1	124	42.3	<u>124</u>	<u>42.3</u>	32	124	42.3	<u>124</u>	<u>42.3</u>	124	42.2
621.wrf_s	32	161	81.9	<u>161</u>	<u>82.3</u>	161	82.4	32	157	84.3	155	85.3	<u>156</u>	<u>84.7</u>
627.cam4_s	32	133	66.5	133	66.7	<u>133</u>	<u>66.6</u>	32	<u>132</u>	<u>66.9</u>	132	66.9	133	66.7
628.pop2_s	32	<u>190</u>	<u>62.5</u>	190	62.6	191	62.1	32	190	62.4	192	61.9	<u>191</u>	<u>62.2</u>
638.imagick_s	32	<u>161</u>	<u>89.7</u>	162	89.1	155	93.2	32	158	91.4	154	93.5	<u>156</u>	<u>92.7</u>
644.nab_s	32	<u>104</u>	<u>168</u>	104	169	104	168	32	104	168	<u>104</u>	<u>168</u>	104	169
649.fotonik3d_s	32	<u>116</u>	<u>78.6</u>	118	77.0	116	78.8	32	118	77.5	116	78.6	<u>116</u>	<u>78.3</u>
654.roms_s	32	111	142	110	143	<u>111</u>	<u>142</u>	32	105	150	105	150	<u>105</u>	<u>150</u>

SPECSpeed2017_fp_base = 104

SPECSpeed2017_fp_peak = 105

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance
Hyper-Threading set to Disable

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECspeed2017_fp_base = 104

SPECspeed2017_fp_peak = 105

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Feb-2018

Platform Notes (Continued)

MONITORMWAIT set to Enable
Adjacent Cache Prefetch set to Disable
Stale AtoS set to Enable
DCA set to Enable
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on Cable-SPECcpu2006-SUSE12SP2 Fri May 4 06:37:14 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 16
  siblings      : 16
 physical 0:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 physical 1:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Thread(s) per core:    1
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:               4
CPU MHz:                2095.063
BogoMIPS:               4190.12
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               22528K
NUMA node0 CPU(s):     0-15
NUMA node1 CPU(s):     16-31
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 104

ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECspeed2017_fp_peak = 105

CPU2017 License: 9017

Test Date: May-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Feb-2018

Platform Notes (Continued)

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 193110 MB
node 0 free: 192057 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 193504 MB
node 1 free: 192712 MB
node distances:
node   0   1
  0:  10  21
  1:  21  10

```

From /proc/meminfo

```

MemTotal:      395893468 kB
HugePages_Total:       0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECspeed2017_fp_base = 104

SPECspeed2017_fp_peak = 105

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Feb-2018

Platform Notes (Continued)

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

```
Linux Cable-SPECcpu2006-SUSE12SP2 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC
2018 (c6ce5db) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 4 01:27

SPEC is set to: /home/cpu2017.1.0.2.ic18.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	744G	263G	480G	36%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE113W-1.12]- 02/06/2018

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 619.lbm_s(peak)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 104

ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECspeed2017_fp_peak = 105

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Feb-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 607.cactuBSSN_s(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

CC 621.wrf_s(peak) 628.pop2_s(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECspeed2017_fp_base = 104

SPECspeed2017_fp_peak = 105

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:

-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp

-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

-nostandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECspeed2017_fp_base = 104

SPECspeed2017_fp_peak = 105

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECspeed2017_fp_base = 104

SPECspeed2017_fp_peak = 105

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP
```

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
-align array32byte
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.10 GHz, Intel Xeon Gold 6130)

SPECspeed2017_fp_base = 104

SPECspeed2017_fp_peak = 105

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

Peak Other Flags (Continued)

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-03 18:37:14-0400.

Report generated on 2018-10-31 17:50:15 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-12.